



Dan-MIRROR  
SAFETY MIRRORS SINCE 1975



# Parking Safety solutions by Dancop



# ELITMAT

FOR A BETTER LIFE AT THE WORKPLACE



Since more than 50 years we help companies with the right safety solutions, making their world safer.

Dancop carries a wide range of products to secure parking areas. From Traffic Mirrors, to bollards and posts in visible colors, to cable protection, parkstop ramps and EV charger protection.

**We have made it our business, to make your workplace environment safer.**

We see ourselves as experts within people's safety, and as your trusted advisor, and **together we create safety.**


For more information or a customized consultation, please contact us.







## ADVANCED PE SOLUTION BY d-flexx

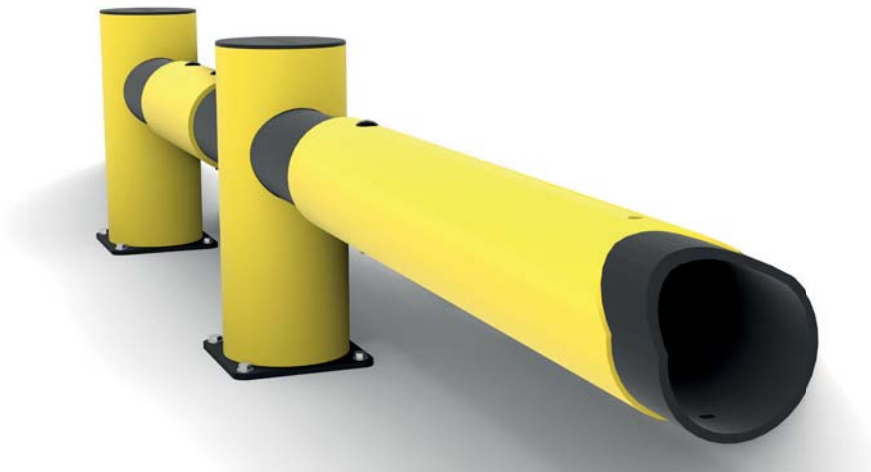


### A flexible and durable solution

Our unique advanced polymer structure engineered by our Research and Development department, is exclusively found in the d-flexx product line. Its innovative design pushes the outstanding properties of polyethylene (PE) to their ultimate performance.

d-flexx offers the optimal balance between resistance and flexibility. During a collision, the barrier absorbs the energy, preventing damage to the colliding vehicle and the flooring. Moreover, PE has a native molecular memory that makes it reshape after an impact.

d-flexx materials are engineered to fully perform in every environment from indoor to outdoor settings, in both dry and humid conditions, and throughout temperatures from  $-40^{\circ}\text{C}$  to  $50^{\circ}\text{C}$ . Polyethylene's chemical resistance and easy-to-clean surface makes it an ideal choice for hygienic environments.

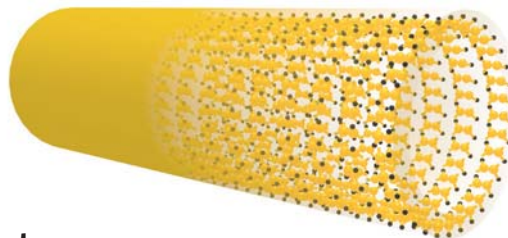

### Minimal design, maximal output

Our advanced PE solution captures our industrial philosophy, upholding the highest standards with efficient design and a streamlined manufacturing process. We thrive on combining excellence with a simple and cost-effective structure.

d-flexx offers outstanding durability and leverages polyethene's excellent recycling properties, ensuring a sustainable lifecycle from production to disposal.





## THE ADVANTAGES OF DANCOP-MIRRORS

- UV-resistant
- Clear mirror image without distortion
- Easy installation
- Several options for fixing
- Fixing for round or rectangle post or wall fixing included
- Wind load-tested until wind force 12 (hurricane > 117 km/h)

	Acrylic	Polycarbonate	Inox
Material	70 % more impact resistant than glass	Nearly indestructible	Nearly indestructible
	UV-resistant	UV-resistant	UV-resistant
	Low weight	Low weight	High temperature resistance
	Impact resistant according to DIN EN ISO 179-1	Low flammability	Chemical resistance



## SAFETY SOLUTIONS FROM CRASH STOP

Crash Stop is a brand dedicated to enhancing safety and protection in parking lots with innovative solutions. Their robust barriers, bollards, and wheel stops are designed to prevent accidents, protect pedestrians, and prevent vehicle damage.

Made from durable, high-quality materials, Crash Stop products provide reliable impact resistance while being easy to install and maintain.





## 01 STEEL POST PROTECTION

Post and column protection for posts up to 400 x 400 mm, in two parts (600 x 530 mm). Galvanized and powder-coated for outdoor use, or powder-coated for indoor use, in yellow (similar to RAL 1023) with black warning stripes. The base plate is 160x70mm, with 8 screws ( $\varnothing$  12.5 mm) for floor mounting. This post is TÜV-certified and compliant with the DGUV 108-007 safety standard from the German Social Accident Insurance (DGUV). Ideal for protecting posts indoors and outdoors, with easy installation via base plates.

*\*Details see page 20*



## 02 IMPACT PROTECTION BOLLARD

The impact protection bollard is galvanized and powder-coated for outdoor use. It features a yellow colour (similar to RAL 1023) with black warning stripes for high visibility. This bollard is TÜV-certified, ensuring reliable quality and safety.

*\*Details see page 20*



## 03 IMPACT CORNER PROTECTION

Impact corner protection with 600 mm arms, a diameter of 76 mm, and a material thickness of 3.2 mm. It features a base plate measuring 120 x 195 mm and is mounted to the floor via 12 screws, each with a diameter of 12.5 mm. This product is TÜV-certified.

*\*Details see page 20*



# FLEXIBLE PROTECTION



## 04 SAFETY BARRIER DELTA 3

The flexible d-flexx safety barrier DELTA is an innovative and cost-efficient solution for separating pedestrian areas from vehicle routes. Its modular system allows for customized configurations. Mounting material is included, and all DELTA railings are compatible with the swing door JULIET and slide gate OSCAR.

*\*Details see page 21*



## 05 BOLLARD BRAVO

With their robustness and high visibility, these bollards are ideal for parking areas, entrances and pedestrian zones.

The Bravo bollard features a 200 mm diameter and comes in heights of 500 mm, 750 mm, or 1200 mm. Mounting materials are included.

*\*Details see page 21*



## 06 UNDERRIDE GUARD MIKE

The flexible d-flexx kerb barrier MIKE is ideal for protecting walls and assembly lines from collisions in low ground areas. It can be combined with most d-flexx products, including CHARLIE, DELTA, ECHO, FOXTROT, GOLF, HOTEL, KILO, and LIMA. The barrier height is 140 mm.

*\*Details see page 21*

# BARRIER POSTS

**TUVNORD**  
TUV NORD CERT GmbH  
Baumuster  
geprüft  
tuev-nord.de



## 07 BARRIER POSTS AND ACCESSORIES








**30 DIFFERENT VARIANTS.**  
THE RIGHT POST FOR EVERY OCCASION.



# BARRIER POSTS

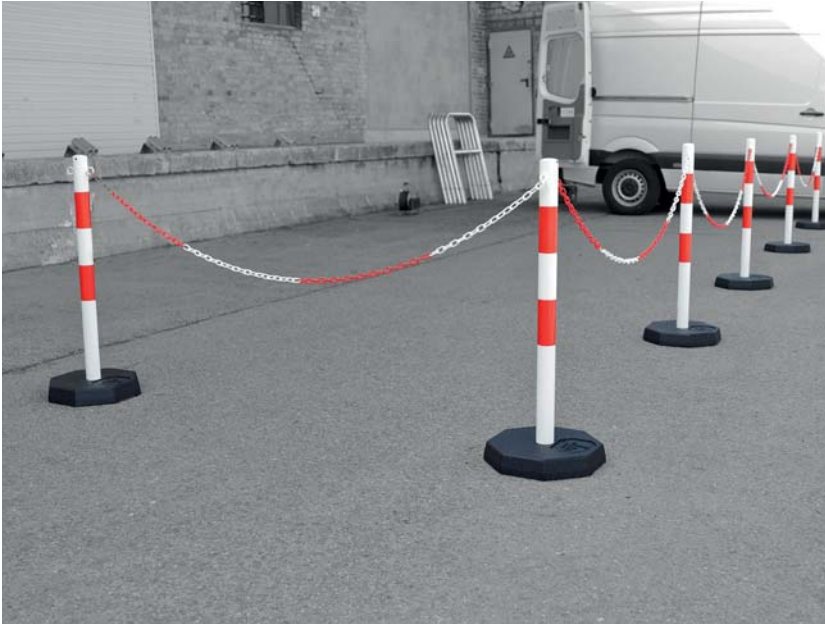

## 08 CHAIN POST SET

The chain post set includes six posts, mobile base plates (7 kg), and a 25 m polyethylene chain. It is available in two color options: red-white with red reflective foil, and yellow-black.

*\*Details see page 22*



## 09 TRANSPORTATION RACK WITH CHAIN POST SET

The transport rack for the chain post set is the ideal solution for moving and storing the individual components. Equipped with casters, it ensures easy handling and transport of the items.



*\*Details see page 22*



## 10 LIGHT CHAIN POST SET

The light chain post set includes 6 posts (Ø 40 mm) with eyelets, 6 mobile base plates, and a 10 m polyethylene chain. It is designed for indoor use and is available in two color options: yellow-black and red-white.

*\*Details see page 22*





## **11 FLEXIBLE POSTS**

The flexible posts are used for traffic separation and routing and for highlighting dangerous areas. High visibility due to reflective foil. The very flexible material bends upon impact and returns to its original shape. Its bayonet lock allows for easy installation and removal.

*\*Details see page 22*



## **12 FLEXIBLE POSTS WITH CHAIN**

Polyurethane flexible posts are cost-effective for area delineation and marking. On impact, they deform and return to shape, offering 360° tilting. Available in various colors and heights for versatile use, they feature reflective stripes for safety. Produced in one piece, they can be floor-mounted with 3 drill holes. Caps for chain sets are available separately.

*\*Details see page 22*



## **13 FLEXIBLE POSTS**

The flexible polyurethane posts are an affordable solution for area delimitation and marking. They deform upon collision and return to their original shape, offering 360° tilting. Available in various colors and heights, they feature reflective stripes for increased safety. The one-piece posts can be bolted to the floor using 3 drill holes. Caps for a chain set are available separately.

*\*Details see page 23*

# PARKING PROTECTION



## **14 PARK STOP**

The park stop offers a simple solution for clearly marked parking spaces while also providing protection against vehicle damage and impact to buildings or walls. Made from 100% recycled rubber, it is suitable for both indoor and outdoor use and remains unaffected by UV rays and cold weather. Installation is easy using pre-drilled holes and screws, and its yellow reflective warning markings ensure high visibility and durability.

*\*Details see page 23*



## **15 HEAVY-DUTY WHEEL STOP**

The heavy-duty truck wheel stop is a durable parking barrier made from high-density recycled rubber, designed for long-term use. Ideal for trucks, buses and industrial vehicles, it prevents damage to vehicles and structures. Equipped with yellow reflective markings for visibility, it also accommodates cables up to 20mm in diameter and features pre-drilled holes for easy screw mounting.

*\*Details see page 23*



## **16 CURB RAMP**

The curb ramps provide barrier-free access to sidewalks, garage entrances, or industrial areas. Their profiled surface ensures solid grip for motor vehicles, bicycles, wheelchairs, or forklifts. They can be mounted to the ground for permanent installation and feature channels for water drainage or cable tunnels. Made from durable material, they withstand environmental influences for long-term use.

*\*Details see page 23*





## **17 SPEED RAMPS**

Made from up to 70% recycled rubber. Increased visibility due to yellow-black warning marking. High signalling effect due to integrated reflectors. Quick and easy to use.

Height: 50 mm or 75 mm.

Recommended max. speed:

Height 50 mm: max. 20 km/h

Height 75 mm: max. 10 km/h

*\*Details see page 24*



## **18 HOSE & CABLE PROTECTOR**

Quick-to-use protection for hoses and cables in traffic areas. The 3 inlets on the bottom allow the insertion of cables and hoses of up to Ø 40 mm. The grooved bottom side prevents shifting to enable fast crossing. The hose and cable bridges are completely imbued to ensure long-term use. The variants are available in different lengths to serve all areas.

*\*Details see page 24*



## **19 HOSE & CABLE BRIDGE**

These hose and cable bridges are the best possible protection for hoses and cables for both in- and outdoors. They are colored all the way through. If necessary, the individual parts can be connected. The resilience allows the passage of trucks of up to 40 t and ensures functionality under all weather conditions.

*\*Details see page 24*



## **20 CABLE PROTECTOR WITH LID**

The modular cable protector with lid are a reliable protection in streets or pathways. The yellow-black coloring allows fast recognition. The individual elements can be connected via connectors on either side. Cables are easily inserted from above. The lid is made of a highly resistant plastic. The chamfered sides allow for a smooth passage and trouble-free traffic flow.

*\*Details see page 25*



# BARRIER FENCES



## **21 BARRIER FENCE**

The barrier fences are the perfect solution for blocking off and marking obstacles. The big and solid feet in combination with the hook-and-eye element ensure high stability.

A storage rack is available for the barrier fences. Rotatable feet are for easy storage and transportation.

Red-white reflective foil (type RA1) for optimal visibility.

*\*Details see page 25*







## **22 FLOOR MARKER**

The floor marker is ideal for marking internal pathways in compliance with workplace regulations. Compatible with tape rolls of 50-75 mm, it allows easy and precise application on dry, grease-free, and dust-free surfaces.

*\*Details see page 26*



## **23 RAMP GUARDRAILS**

The galvanized crash stop ramp protection guard allows you to secure ramps in industrial areas where fast access is needed. The design ensures quick removal from and insertion to the mounting sleeves. The modular system can be expanded as required via start/end sleeves and middle sleeves. Meanwhile, the flat design of the mounting sleeves ensures problem-free handling of pallets and goods.

*\*Details see page 26*

## 24 DSV1 TRAILER STAND

The DVS1 telescopic loading support is TÜV-certified and helps to increase safety when loading and unloading trailers/semi-trailers with a total weight of up to 40 tonnes. It can prevent the trailer from tipping over during loading and unloading. As the DVS1 does not have to be positioned flush under the trailer, but is only under load in the event of an accident (tipping over of the trailer), it is easy to maintain. In accordance with DGUV 208-006 and DGUV 208-009, additional protection during loading and unloading work is strongly recommended by the employers' liability insurance association (VGB). The height of the telescopic device can be adjusted from 1023 mm to 1344 mm.

Our DVS1 is characterised by its simple and user-friendly operation and handling, low maintenance and ease of cleaning.

*\*Details see page 26*





## 25 DSV2 TRAILER STAND

The DVS2 telescopic loading support is TÜV-certified, designed to enhance safety when loading and unloading trailers or semi-trailers with a total weight of up to 40 tonnes. It helps prevent trailer tipping during loading activities and only engages under load in the event of an emergency, such as a tipping incident, making it low-maintenance and easy to manage. This device complies with DGUV regulations 208-006 and 208-009, following recommendations from the employer's liability insurance association (VGB) for additional safety measures during loading operations. With an adjustable height range of 900-1022 mm, the DVS2 is user-friendly, simple to maintain, and easy to clean. Available in RAL 3020.

*\*Details see page 26*



# TRAFFIC MIRRORS



## 26 TM TRAFFIC MIRROR



Our TM-mirror is equipped with a white frame with red reflecting RA2 foil for a better visibility on the streets.

The back side: 4-point fixing with ball joint for an optimal fixation. Included in scope of delivery.



*\*Details see page 27*





## 27 TM-B INOX ICE-FREE TRAFFIC MIRROR

The combination of the INOX mirror surface and the built-in special cushions in the back prevent ice formation on the mirror surface.

Please be aware that our ice-free mirror can fog-up in cases of fast arising and freezing fog, or in exceptionally cold periods without temperature fluctuations.

4-point fixing with ball joint for an optimal fixation. Included in scope of delivery.

*\*Details see page 27*



## 28 TM-I TRAFFIC MIRROR

Our TM-I mirror increases the safety in private and industrial areas. Parking lots, private driveways, shopping centers, and railway platforms are popular operation sites as well. The red frame further enhances the visibility.

4-point fixing with ball joint for an optimal fixation. Included in scope of delivery.

*\*Details see page 27*



## 29 MULTI USE MIRROR UNI-SIG

The UNI-SIG mirror is an economic alternative, used in areas with limited sight: in parking lots, garage exits, and shopping centers.

Rear side 2-point universal mount. Horizontal and vertical locking possible. Included in scope of delivery.

*\*Details see page 28*



## 30 EUVEX TRAFFIC MIRROR

The EUvex traffic mirror increases safety on roads and premises. Due to its robust design it is suitable for long term outdoor use. The type RA2 reflectors ensure good visibility, even in bad weather conditions.

### Material:

The EUvex mirror surface is made of PMMA and equipped with red reflectors (Type RA2) on a white frame. It is UV-stable and weather-resistant.



## 31 EUVEX UNIVERSAL MIRROR

The EUvex universal mirror is equipped with a white frame and very versatile.

### Material

The EUvex universal mirror surface is made of PMMA, UV-stable and weather-resistant.

Photo: Back with standard fixing to the post. Included in scope of delivery.





# TRAFFIC MIRRORS



## 32 TRAFFIC MIRROR EXPLORER

The Explorer wide angle mirror with its convexity of 180° ensures an optimum field of vision. It is ideal to get an overview of production areas or traffic.

Rear side 2-point universal mount. Horizontal and vertical locking possible. Included in scope of delivery (EXPLORER)



## 33 SUBWAY

Both mirrors have an especially wide angle of 180° which provides an enlarged view.

The two 180° versions vary in construction. The SUBWAY-mirror can be mounted not only on posts but directly on the wall as well, by means of the fixing ring. This way it can be seamlessly integrated in underground stations, underpasses and parking garages, making dark corners safer.

The PANORAMA-mirror additionally disposes of a white frame with green reflectors for better visibility during night-time or bad weather conditions.

Material: The nearly indestructible polycarbonate makes these the perfect mirrors for areas with much vandalism.

## 34 PANORAMA

Backside 4-point fixing with ball joint for an optimal fixation. Included in scope of delivery. (SUBWAY & PANORAMA)

## 01 COLUMN PROTECTION

Item No. powder coated	Item No. powder coated and galvanized	Height	Length	Width
SRR-500-	SRR-500	600 mm	530 mm	620 mm
Floor anchors 85 mm galvanized set of 8 pieces Item No. FIX 8				



## 02 IMPACT PROTECTION BOLLARD



Item No.	Diameter	Base plate	Material thickness	Height
50-10	ø 76 mm	120 x 195 mm	3,0 mm	1200 mm
50-25	ø 89 mm	140 x 200 mm	3,5 mm	1200 mm
50-40	ø 159 mm	240 x 240 mm	4,0 mm	1200 mm
50-20	ø 89 mm	-	3,0 mm	1600 mm
50-30	ø 159 mm	-	4,0 mm	1600 mm
FIX 4	Floor anchor 85 mm galvanized set of 4 pieces			



## 03 IMPACT CORNER PROTECTION



Item No. powder coated	Item No. galvanized and powder coated	Height	Length
40-10-	40-10	350 mm	682 mm
40-20-	40-20	600 mm	682 mm
40-30-	40-30	1200 mm	682 mm
FIX 4	Floor anchor 85 mm galvanized set of 4 pieces		






## 04 SAFETY BARRIER DELTA 3

Art. No.	Description	Height	Length	Width
DFFS-M-E	End post	1200 mm	150 mm	150 mm
DFFS-M-M	Middle post	1200 mm	150 mm	150 mm
DFFS-M-W90	90° corner post	1200 mm	150 mm	150 mm
DFFS-M-W22.5	Corner post 22,5°	1200 mm	150 mm	150 mm
DFFS-M-W45	Corner post 45°	1200 mm	150 mm	150 mm
DFFS-M-W67.5	Corner post 67,5°	1200 mm	150 mm	150 mm
DFFS-M-W292.5	Corner post 292,5°	1200 mm	150 mm	150 mm
DFFS-M-W315	Corner post 315°	1200 mm	150 mm	150 mm
DFFS-M-W337.5	Corner post 337,5°	1200 mm	150 mm	150 mm
DFFS-M-T	T-post	1200 mm	150 mm	150 mm
DFFS-M-K	Cross post	1200 mm	150 mm	150 mm
DFFS-H1	Beam set: 3 beams, 1.510 mm			1510 mm
DFFS-HI	Beam set: 3 beams, customized length 350- 1.509 mm			350 - 1509 mm
DFFS-B110	Bollard black	1200 mm	150 mm	150 mm
DFFS-B110Y	Bollard yellow	1200 mm	150 mm	150 mm



## 05 BOLLARD BRAVO

Art. No.	Description	Height	Ø post	Foot plate
DFB050-10	Bollard	1200 mm	200 mm	225 X 225 mm
DFB050-20	Bollard	750 mm	200 mm	225 X 225 mm
DFB050-40	Bollard	500 mm	200 mm	225 X 225 mm
DFB050-30	Bollard with rotatable cuff	1200 mm	200 mm	225 X 225 mm
DFB050-50	Bollard with rotatable cuff	500 mm	200 mm	225 X 225 mm
DFB050-60	Bollard with rotatable cuff	750 mm	200 mm	225 X 225 mm

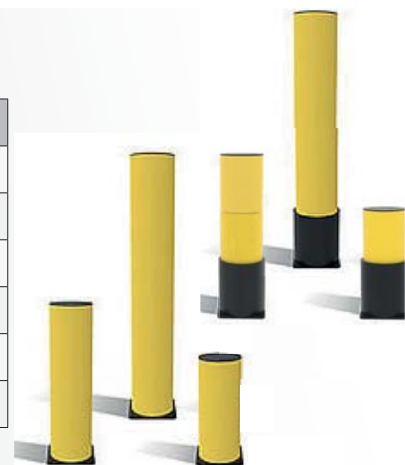

## 03 UNDERRIDE GUARD MIKE

Art. No.	Ø MIKE	Width
DFKB-1	140 mm	1300 mm
DFKB-2	140 mm	2000 mm
DFKB-3	140 mm	1500 mm
DFKB-4	140 mm	1000 mm
DFKB-5	140 mm	500 mm
DFKB-I	140 mm	400 - 1499 mm
DFKB-I2	140 mm	1500 - 1999 mm



## 08 CHAIN POST SET



Item No.	Description	Height	Length	Width
KPS-GS	Chain post set yellow-black	1000 mm	380 mm	25 mm
KPS-RW	Chain post set red-white with red reflecting foil	1000 mm	380 mm	25 mm



## 09 TRANSPORTATION RACK WITH CHAIN POST SET



Item No.	Description	Height	Length	Width
KPS-TG-2-GS	Transport rack and chain post set yellow-black 25 m	960 mm	400 mm	640 mm
KPS-TG-2-RW	Transport rack and chain post set red-white 25 m	960 mm	400 mm	640 mm
KPS-BAG	Protective storage case	560 mm	545 mm	745 mm



## 10 LIGHT CHAIN POST SET

Item No.	Description	Height	Length	Width
SET-LKP-GS	Chain post set yellow-black	825 mm	270 mm	10 m
SET-LKP-RW	Chain post set red-white	825 mm	270 mm	10 m



## 11 FLEXIBLE POSTS

Item No.	Description	Height	Ø post	Ø footplate
SB450	Self-erecting barrier post 450	450 mm	100 mm	260 mm
SB750	Self-erecting barrier post 750	750 mm	100 mm	260 mm
SB1000	Self-erecting barrier post 1000	1000 mm	100 mm	360 mm
SB-FIX	Fixing material set of 3 screws, dowels and washer			



## 12 FLEXIBLE POSTS WITH CHAIN

Item No.	Height	Length	Width
SET-FP-GS-750	750 mm	220 mm	10 m
SET-FP-GS-1000	1000 mm	220 mm	10 m
FP-FIX	Fixing material set of 3 screws and dowels		





## 13 FLEXIBLE POSTS

Item No.	Color	Height	Ø post	Ø foot plate
FP750	Orange	750 mm	80 mm	200 mm
FP750 S	Black	750 mm	80 mm	200 mm
FP1000	Orange	1000 mm	80 mm	200 mm
FP1000 S	Black	1000 mm	80 mm	200 mm
FP-FIX	Fixing material set of 3 screws and dowels			



## 14 PARK STOP

Item No.	Height	Length	Width
PS 90	105 mm	150 mm	900 mm
PS 180	105 mm	150 mm	1800 mm
PS 90 FIX	Fixing Material for PS 90		
PS 180 FIX	Fixing Material for PS 180		




## 15 HEAVY-DUTY WHEEL STOP

Item No.	Description	Height	Length	Width
HDWS 100	Heavy-duty wheel stop	150 mm	300 mm	1000 mm
FS-FIX	Fixing material			



## 16 CURB RAMP

Item No.	Height	Length	Width
BSR100	100 mm	300 mm	600 mm
BSR150	150 mm	355 mm	600 mm

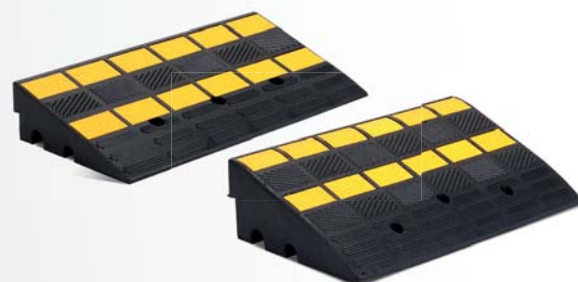

## 17 SPEED RAMPS

Item No.	Description	Height	Length	Width
45010	Middlepiece yellow	50 mm	400 mm	500 mm
45011	Middlepiece black	50 mm	400 mm	500 mm
45020	Start piece, male, yellow	50 mm	400 mm	200 mm
45021	Start piece, male, black	50 mm	400 mm	200 mm
45030	End piece, female, yellow	50 mm	400 mm	200 mm
45031	End piece, female, black	50 mm	400 mm	200 mm
47510	Middlepiece yellow	75 mm	400 mm	500 mm
47511	Middlepiece black	75 mm	400 mm	500 mm
47520	Start piece, male, yellow	75 mm	400 mm	200 mm
47521	Start piece, male, black	75 mm	400 mm	200 mm
47530	End piece, female, yellow	75 mm	400 mm	200 mm
47531	End piece, female, black	75 mm	400 mm	200 mm



## 18 HOSE & CABLE PROTECTOR

Item No.	Description	Height	Length	Width
20012	Cable protector yellow	65 mm	200 mm	1200 mm
20014	Cable protector black	65 mm	200 mm	1200 mm
20010	Cable protector yellow	65 mm	200 mm	1500 mm



## 19 HOSE & CABLE PROTECTOR

Item No.	Color	Height	Length	Width
20020	black	90 mm	830 mm	300 mm
20070	black	90 mm	830 mm	680 mm
20025	yellow	90 mm	830 mm	300 mm
20075	yellow	90 mm	830 mm	680 mm





## 20 CABLE PROTECTOR WITH LID

Item No.	Number tunnels	Height	Length	Width
200D2K	2 tunnels each 32 x 30 mm	45 mm	1015 mm	240 mm
200D2K45L	2 tunnels each 32 x 30 mm, 45° left	45 mm	375 mm	240 mm
200D2K45R	2 tunnels each 32 x 30 mm, 45° right	45 mm	375 mm	240 mm
200D2KA	2 tunnels each 32 x 30 mm, Start piece	45 mm	235 mm	240 mm
200D2KE	2 tunnels each 32 x 30 mm, End piece	45 mm	200 mm	240 mm
200D3K	3 tunnels 50 mm x 68 / 57 / 65 mm	70 mm	935 mm	500 mm
200D3K45L	3 tunnels 50 mm x 68 / 57 / 65 mm, 45° left	70 mm	570 mm	540 mm
200D3K45R	3 tunnels 50 mm x 68 / 57 / 65 mm, 45° right	70 mm	570 mm	500 mm
200D3KE	3 tunnels 50 mm x 68 / 57 / 65 mm, End piece	70 mm	200 mm	500 mm
200D3KA	3 tunnels 50 mm x 68 / 57 / 65 mm, Start piece	70 mm	235 mm	500 mm
200D5K	5 tunnels each 35,3 x 38 mm	50 mm	935 mm	500 mm
200D5K45L	5 tunnels each 35,3 x 38 mm, 45° left	50 mm	570 mm	540 mm
200D5K45R	5 tunnels each 35,3 x 38 mm, 45° right	50 mm	570 mm	540 mm
200D5KE	5 tunnels each 35,3 x 38 mm, End piece	50 mm	235 mm	500 mm
200D5KA	5 tunnels each 35,3 x 38 mm, Start piece	50 mm	200 mm	500 mm



## 21 BARRIER FENCE

Item No.	Description	Height	Length	Width
20001	Fence white	1000 mm	660 mm	2000 mm
20002	Fence yellow	1000 mm	660 mm	2000 mm
LTG-AG	Storage and transport rack, galv.	1250 mm	820 mm	1700 mm
VE-LTG-20001	Complete set: storage and transport rack incl. 15 pieces white barrier fences	1250 mm	820 mm	1700 mm
VE-LTG-20002	Complete set: storage and transport rack incl. 15 pieces yellow barrier fences	1250 mm	820 mm	1700 mm



## 22 FLOOR MARKER

Item No.	Description	Height	Length	Width
BMG	Floor marker for tape rolls 50-75 mm	870 mm	140 mm	260 mm
Ground marking tape for floor marker, PVC, 5 pieces per set, water resistant, with non-corrosive and resistant glue				
SET-MB-G-50	Ground marking tape	yellow		
SET-MB-G-75	Ground marking tape	yellow		
SET-MB-GS-50	Ground marking tape	yellow-black		
SET-MB-GS-75	Ground marking tape	yellow-black		
Ground marking tape, made of metal, can be driven over, material thickness 0,7 mm, width 100 mm				
MB-ST1	Ground marking tape	yellow		
MB-ST2	Ground marking tape	yellow		



## 23 RAMP GUARDRAILS

Item No.	Description	Product height	Mounted height	Width
RSG-1000	Ramp guardrail with cross bar, galvanized	1300 mm	1100 mm	974 mm
Item No.	Description	Product height	Length	Width
RSG-MH	Mounting sleeve initial-end	200 mm	195 mm	200 mm
RSG-AEH	Central mounting sleeve	200 mm	195 mm	130 mm



## 24 DSV1 TRAILER STAND

Item No.	Description	Height	Length	Width
DVS1	Trailer stand	1023 - 1344 mm	670 mm	760 mm



## 25 DSV2 TRAILER STAND

Item No.	Description	Height	Length	Width
DVS2	Trailer stand	900 - 1022 mm	670 mm	760 mm





## 26 TM TRAFFIC MIRROR

Art. No.	Material	Dimensions	Viewing distance
TM AC 60	Acrylic	ø 60 cm	9 - 15 m
TM AC 80	Acrylic	ø 80 cm	15 - 22 m
TM AC 40 X 60	Acrylic	40 x 60 cm	9 - 15 m
TM AC 60 X 80	Acrylic	60 x 80 cm	15 - 22 m
TM AC 80 X 100	Acrylic	80 x 100 cm	22 - 27 m
TM AC 100 X 120	Acrylic	100 x 120 cm	27 - 32 m
TM PC 60	Polycarbonate	ø 60 cm	9 - 15 m
TM PC 80	Polycarbonate	ø 80 cm	15 - 22 m
TM PC 40 X 60	Polycarbonate	40 x 60 cm	9 - 15 m
TM PC 60 X 80	Polycarbonate	60 x 80 cm	15 - 22 m
TM PC 80 X 100	Polycarbonate	80 x 100 cm	22 - 27 m
TM INOX 60	Inox	ø 60 cm	9 - 15 m
TM INOX 80	Inox	ø 80 cm	15 - 22 m
TM INOX 40 X 60	Inox	40 x 60 cm	9 - 15 m
TM INOX 60 X 80	Inox	60 x 80 cm	15 - 22 m



## 27 TM-B INOX ICE-FREE TRAFFIC MIRROR

Art. No.	Material	Dimensions	Viewing distance
TM-B INOX 60	Inox	ø 60 cm	9 - 15 m
TM-B INOX 80	Inox	ø 80 cm	15 - 22 m
TM-B INOX 40 X 60	Inox	40 x 60 cm	9 - 15 m
TM-B INOX 60 X 80	Inox	60 x 80 cm	15 - 22 m




## 28 TM-I TRAFFIC MIRROR

Art. No.	Material	Dimensions	Viewing distance
TM-I AC 50	Acrylic	ø 50 cm	5 - 7 m
TM-I AC 60	Acrylic	ø 60 cm	9 - 15 m
TM-I AC 80	Acrylic	ø 80 cm	15 - 22 m
TM-I AC 40 X 60	Acrylic	60 x 80 cm	9 - 15 m
TM-I AC 60 X 80	Acrylic	60 x 80 cm	15 - 22 m



## 29 MULTI USE MIRROR UNI-SIG

Art. No.	Material	Dimensions	Viewing distance
US TYP1 40 X 60	Acrylic	40 x 60 cm	5 - 7 m
US TYP1 60 X 80	Acrylic	60 x 80 cm	9 - 15 m
US TYP1 80 X 100	Acrylic	80 x 100 cm	15 - 22 m

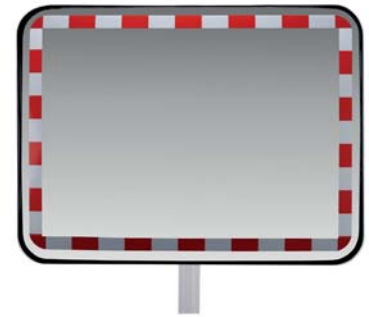

## 30 EUVEX TRAFFIC MIRROR

Art. No.	Material	Dimensions	Viewing distance
ED 40 X 60	Acrylic	40 x 60 cm	9 - 15 m
ED 60 X 80	Acrylic	60 x 80 cm	15 - 22 m
ED 80 X 100	Acrylic	80 x 100 cm	22 - 27 m
ED 60	Acrylic	ø 60 cm	9 - 15 m
ED 80	Acrylic	ø 80 cm	15 - 22 m
ED-Wandarm	Wall fixing, distance 20 cm		



## 31 EUVEX UNIVERSAL MIRROR

Art. No.	Material	Dimensions	Viewing distance
ED-U 40 X 60	Acrylic	40 x 60 cm	9 - 15 m
ED-U 60 X 80	Acrylic	60 x 80 cm	15 - 22 m
ED-U 80 X 100	Acrylic	80 x 100 cm	22 - 27 m
ED-U 60	Acrylic	ø 60 cm	9 - 15 m
ED-U 80	Acrylic	ø 80 cm	15 - 22 m
ED-Wandarm	Wall fixing, distance 20 cm		






## 05 TRAFFIC MIRROR EXPLORER

Art. No.	Material	Dimensions	Viewing distance
EXPLORER 60	Acrylic	ø 60 cm	9 - 15 m
EXPLORER 80	Acrylic	ø 80 cm	15 - 22 m



## 06 SUBWAY

Art. No.	Material	Dimensions	Viewing distance
SUBWAY-W	Steel ring for wall fixing		
SUBWAY	Polycarbonate	ø 60 cm	9 - 15 m

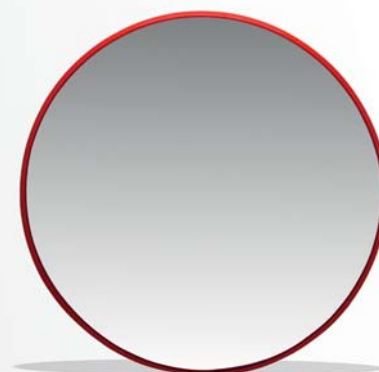

## 07 PANORAMA

Art. No.	Material	Dimensions	Viewing distance
TM PC 360	Polycarbonate	ø 60 cm	15 - 22 m



# ELITMAT

FOR A BETTER LIFE AT THE WORKPLACE



Our references:

SKODA Continental LEONI



MOBIS




MAHLE



Panasonic



[www.elitmat.eu](http://www.elitmat.eu)

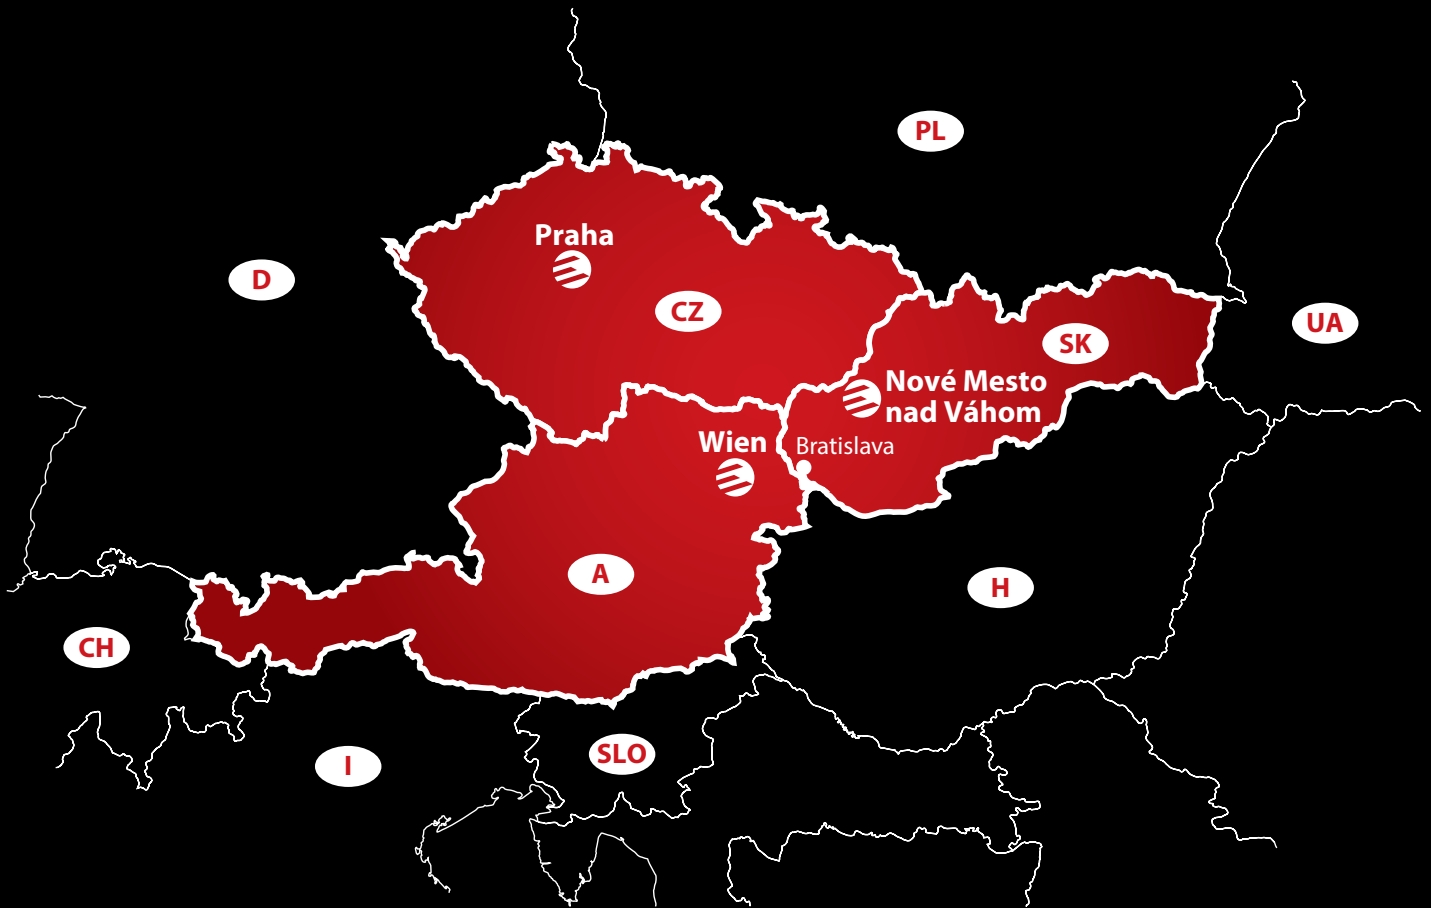

**Elitmat s.r.o.**  
Beckovská 32, Nové Mesto n./Váh.  
Slovenská republika  
+421 917 979 772  
[info@elitmat.sk](mailto:info@elitmat.sk)



**Elitmat Czech s.r.o.**  
Chodovská 228/3, Praha  
Česká republika  
+420 773 931 555  
[info@elitmat.cz](mailto:info@elitmat.cz)



**Elitmat GmbH**  
Seidlgasse 41/9, Wien  
Österreich  
+43 664 5205 591  
[info@elitmat.at](mailto:info@elitmat.at)

[www.elitmat.sk](http://www.elitmat.sk)

[www.elitmat.cz](http://www.elitmat.cz)

[www.elitmat.at](http://www.elitmat.at)

